

Specifications

Panel type Induvidial

Camera 1/4"
Resolution 2 Mpx

Camera angle 90° (horizontal)
Output video HD (1280 × 720),
H.264 Main Profile

Night backlight 6 LEDs Light sensitivity 0,01 LuX

Protection class IP64

 $\begin{array}{lll} \mbox{IK-Code} & \mbox{IK06} \\ \mbox{Working temperature} & \mbox{-40} - +65 \ ^{\circ}\mbox{C} \end{array}$

Power consumption 6,5 W, in standby — 2,5 W Power supply +12 V DC, PoE 802.3af

Body ABS plastic
Colors Black / Silver

Size of the pane $102 \times 160 \times 46 \text{ mm}$

Installation Surface mount with and without a hood

(brackets included)

Main features

Camera resolution 2.0 MP

nera resolution link Software Link support

Touch call button

Protection class IP64

IK-Code IK06

Integration with ACS

PoE and +12V DC

Output video 720p

Plastic case

Working temperature -40 - +65 °C

Functional capabilities

Interface Multi-language graphical and WEB interface

Lock opening By means of a monitor

By QR code By guest link

The BAS-IP Intercom app The BAS-IP Link app

From API

Identifiers in the panel memory (QR codes, cards, key fobs, UKEY,

access codes)

20 000

Integration with ACS Wiegand

Built-in Wiegand input 26, 34, 58 bits

Connection of the additional Wiegand input: from 6 to 128 bits inclusive

SH-12 module and its support Wiegand output for card, key fob, UKEY, QR, Face,
Digital code, and all other types of identifiers:

from 26 to 128 bits inclusive.

Shortcut buttons 1 touch call button

Number of call melodies 4 polyphonic melodies

Authentication Separate password for settings and WEB – interface

Additionally Software Link support, SIP P2P, Built-in relay,

Open API

Color variations





BLACK



SILVER

Appearance and mechanical mounting

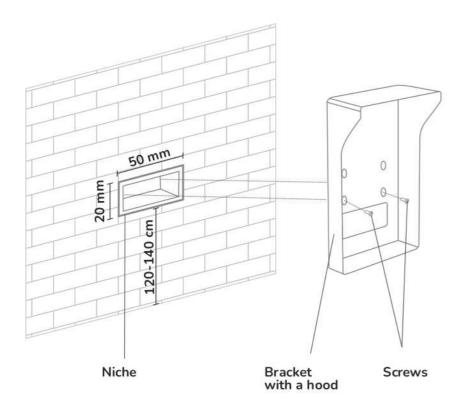



Outdoor Panel