



AV-05FD


ENTRANCE PANEL

Description

BAS-IP AV-05FD — stylish vandal-proof panels with installation by the flush mount method. Each panel provides a perfect video image and sound transmission to the indoor monitors.

These individual entrance panels are suitable for installation both in apartments and in offices, factories, gas stations, etc.



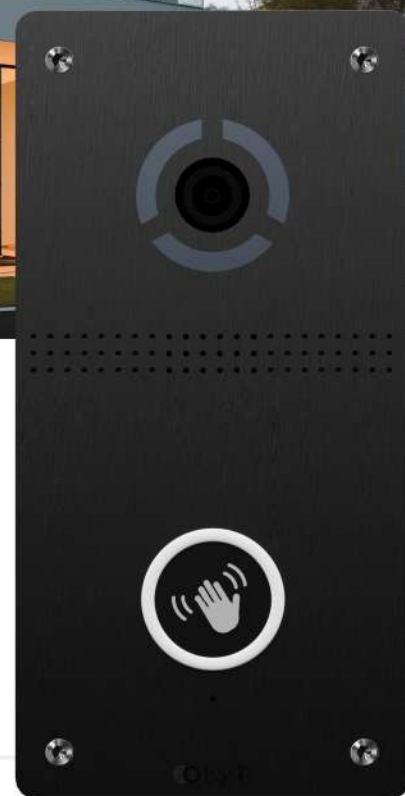







There is also the possibility of individual text or logo appliance on the panel (through in the service center).



Specifications

Panel type	Individual
Camera	1/4"
Resolution	2 Mpx
Camera angle	100° (horizontal)
Output video	FullHD (1920×1080), H.264 Main Profile
Button	Touch-free
Response distance	15 — 25cm (dependigon external conditions)
Night backlight	6 LEDs
Light sensitivity	0,01 LuX
Protection class	IP65
IK-Code	IK08
Working temperature	-40 — +65 °C
Power consumption	6,5 W, in standby — 3,6 W
Power supply	PoE, +12 V DC
Body	Aluminum
Colors	Black / Silver / Gold
Dimensions for installation	85 × 180 × 45 mm
Size of the panel	95 × 190 × 27 mm
Installation	Flush mount

Main features

-  Camera resolution 2.0 MP
-  Software Link support
-  Touch-free button
-  Protection class IP64
-  Flush mounting
-  IK-Code IK08
-  PoE and +12V DC
-  Aluminum case
-  Open API
-  Working temperature -40 — +65 °C

Functional capabilities

Interface	Multi-language graphical and WEB interface
Lock opening	By means of a monitor By QR code By guest link The BAS-IP Intercom app The BAS-IP Link app From API
Identifiers in the panel memory (QR codes, cards, key fobs, UKEY, access codes)	20 000
Connection of the additional SH-12 module and its support	Wiegand input: from 6 to 128 bits inclusive Wiegand output for card, key fob, UKEY, QR, Face, Digital code, and all other types of identifiers: from 26 to 128 bits inclusive.
Shortcut buttons	1 touchless call button
Authentication	WEB – interface and RTSP stream
Additionally	Software Link support, SIP P2P, Built-in relay, Open API

Color variations



BLACK



SILVER



GOLD

Appearance and mechanical mounting

